



## AK-47 REAR SIGHT RAIL INSTALLATION INSTRUCTIONS

### KIT INCLUDES:

- Rear Sight Rail
- Hex Head Wrench
- Toe Clamp
- 8-32 x 5/8" Socket Head Cap Screw (rail mount screw)
- 8-32 x 11/2" Socket Head Cap Screw (toe clamp screw)

### STEP 1: REMOVE REAR SIGHT LEAF

Rotate rear sight leaf up. Push and hold down on end of rear sight spring with screwdriver or equivalent tool. Pull rear sight leaf up and out through rear sight base grooves.




### STEP 2: REMOVE REAR SIGHT SPRING

Grasp end of rear sight spring with pliers or equivalent tool. Pull rear sight spring forward out of rear sight base.



### STEP 3: ASSEMBLE RAIL

Insert toe clamp into rear sight rail body. Insert toe clamp screw through body and screw into toe clamp. Do not tighten toe clamp screw.

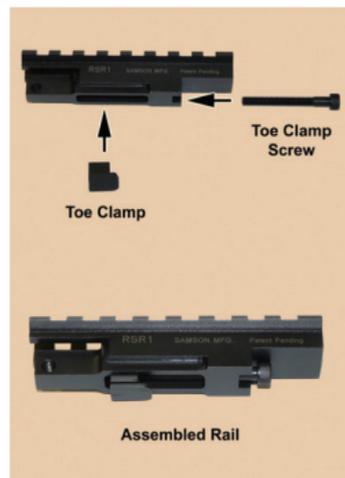

### STEP 4: INSERT RAIL

Remove receiver cover and recoil spring assembly as required. Align assembled rail front mounting hole to rear sight leaf pivot hole. Insert front of assembled rail into rear sight base and rotate down into base. Adjust position of toe clamp as required.



### STEP 5: INSTALL RAIL MOUNTING SCREW

On opposite side of weapon, insert rail mounting screw. Do not fully tighten screw.



### STEP 6: TIGHTEN HARDWARE

Tighten toe clamp screw until toe clamp seats into rear sight base. Tighten rail mounting screw.

